

ELEMENT

900 PORTRAIT



REAL  FLAME

ELEMENT 900 PORTRAIT


The Element 900 Portrait utilises everything spectacular in the High Efficient Element range into a more defining Portrait design. This elegant gas heater operates on Natural gas and LPG and is equipped with the best-in-class Magiglo burner. This heater is designed for an efficient combustion with up to 4.7 star rating and it maximises performance by heating up to 95m² of your space. An impressive heater with a graceful design.

Connecting back to Australian roots

Element 900 Portrait is an Australian made heater that includes media options which are inspired by a collection of native Australian woodland gatherings. The rugged and rustic alpine forest media set is an added accessory that speaks of the heritage Australian forest floor.

Versatility in installation

The heater can be fitted with a 50mm trim or a much sleeker 18mm trim that comes with a flange kit for ease of installation. Real Flame's dynamic powerflue system is utilised for a safe and efficient flueing system. Portrait can be flued up to 9 meters - horizontally, vertically or under the floor without the requirement of any polypropylene pipe. Making installation of the fireplace uncomplicated and straightforward.

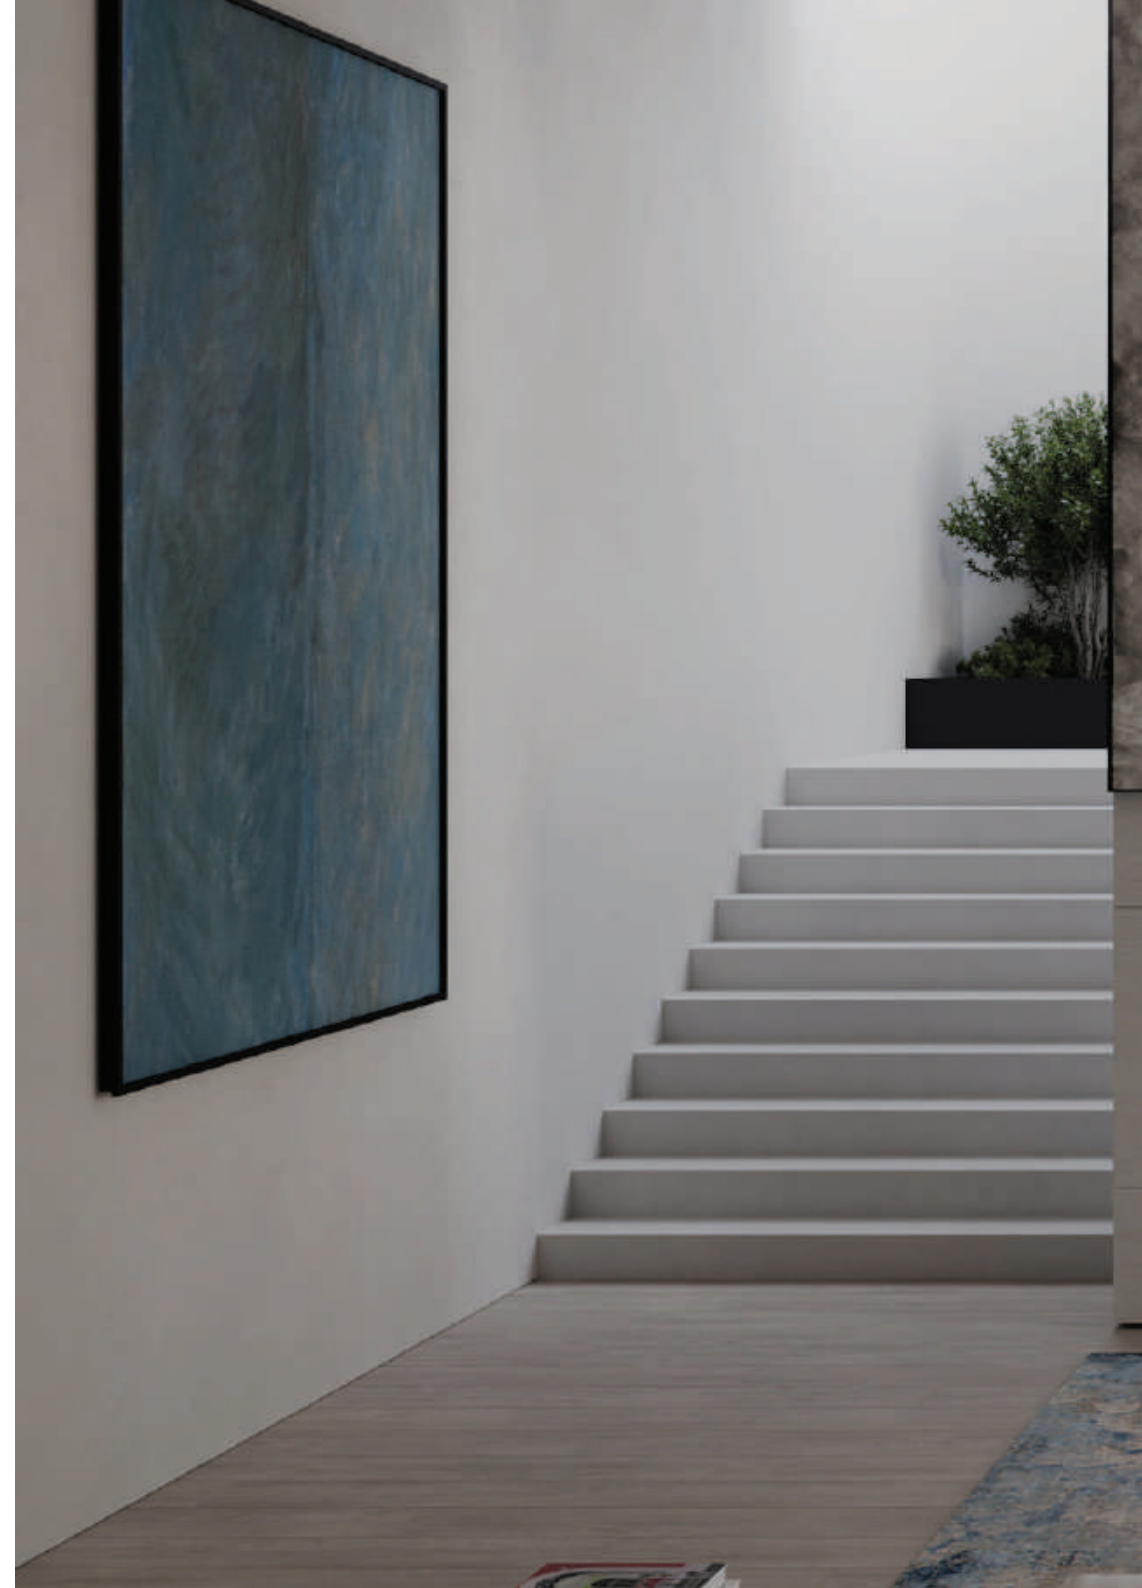



KEY SELLING FEATURES




PORTRAIT DESIGN

The all new Portrait size in the efficient Element range.



ALL NEW MEDIA SET

Introducing the Alpine forest media set. Inspired by the Australian woodlands.



FASCIA

Multiple fascia options. Choose between a 50mm trim or an 18mm trim with a flange kit.



MULTIPLE FLUE INSTALLATION

with up to 13.5m flue: horizontal, vertical, or under the floor. Install 0-9m with the insulated balanced powerflue kit.



CHARMING FLAME PATTERNS

Portrait utilises the latest Magiglo burner to conjure an elegant flame pattern.



POWERFUL ROOM COVERAGE

Heats up to 95m² of room with 6.6kW output to keep those winter chills away.



APP CONTROL



Real Flame app lets you control the fireplace remotely. App available in android and iOS devices.



REMOTE CONTROL

Convenience of operation with a touch of a button.


UNIT DIMENSIONS

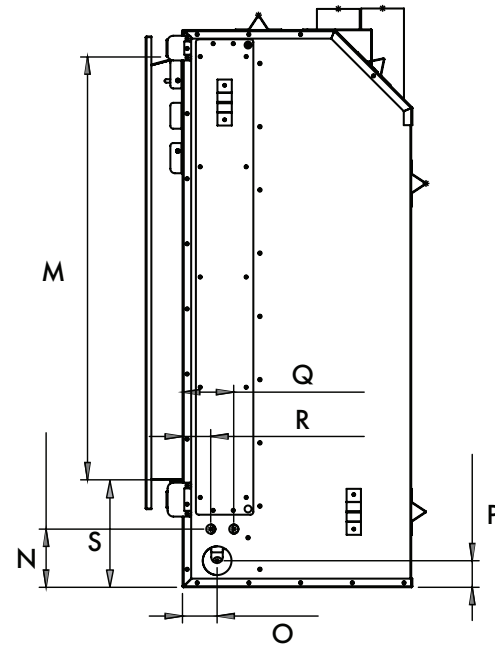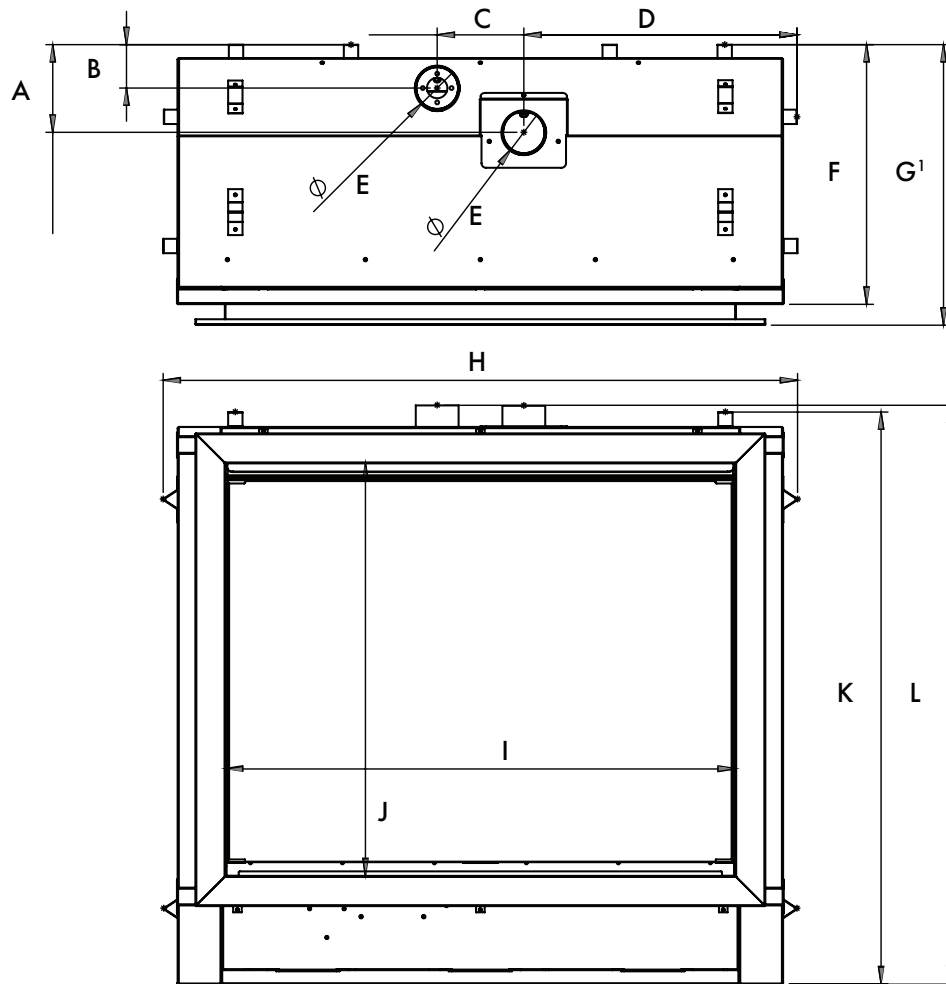

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
153	76	626	475	74.5	452	472	1103	887	714	995	1007	731	101	60	46	90	50	166

G¹- Dimension are subject to plaster thickness

MINIMUM FRAME OUT DIMENSIONS

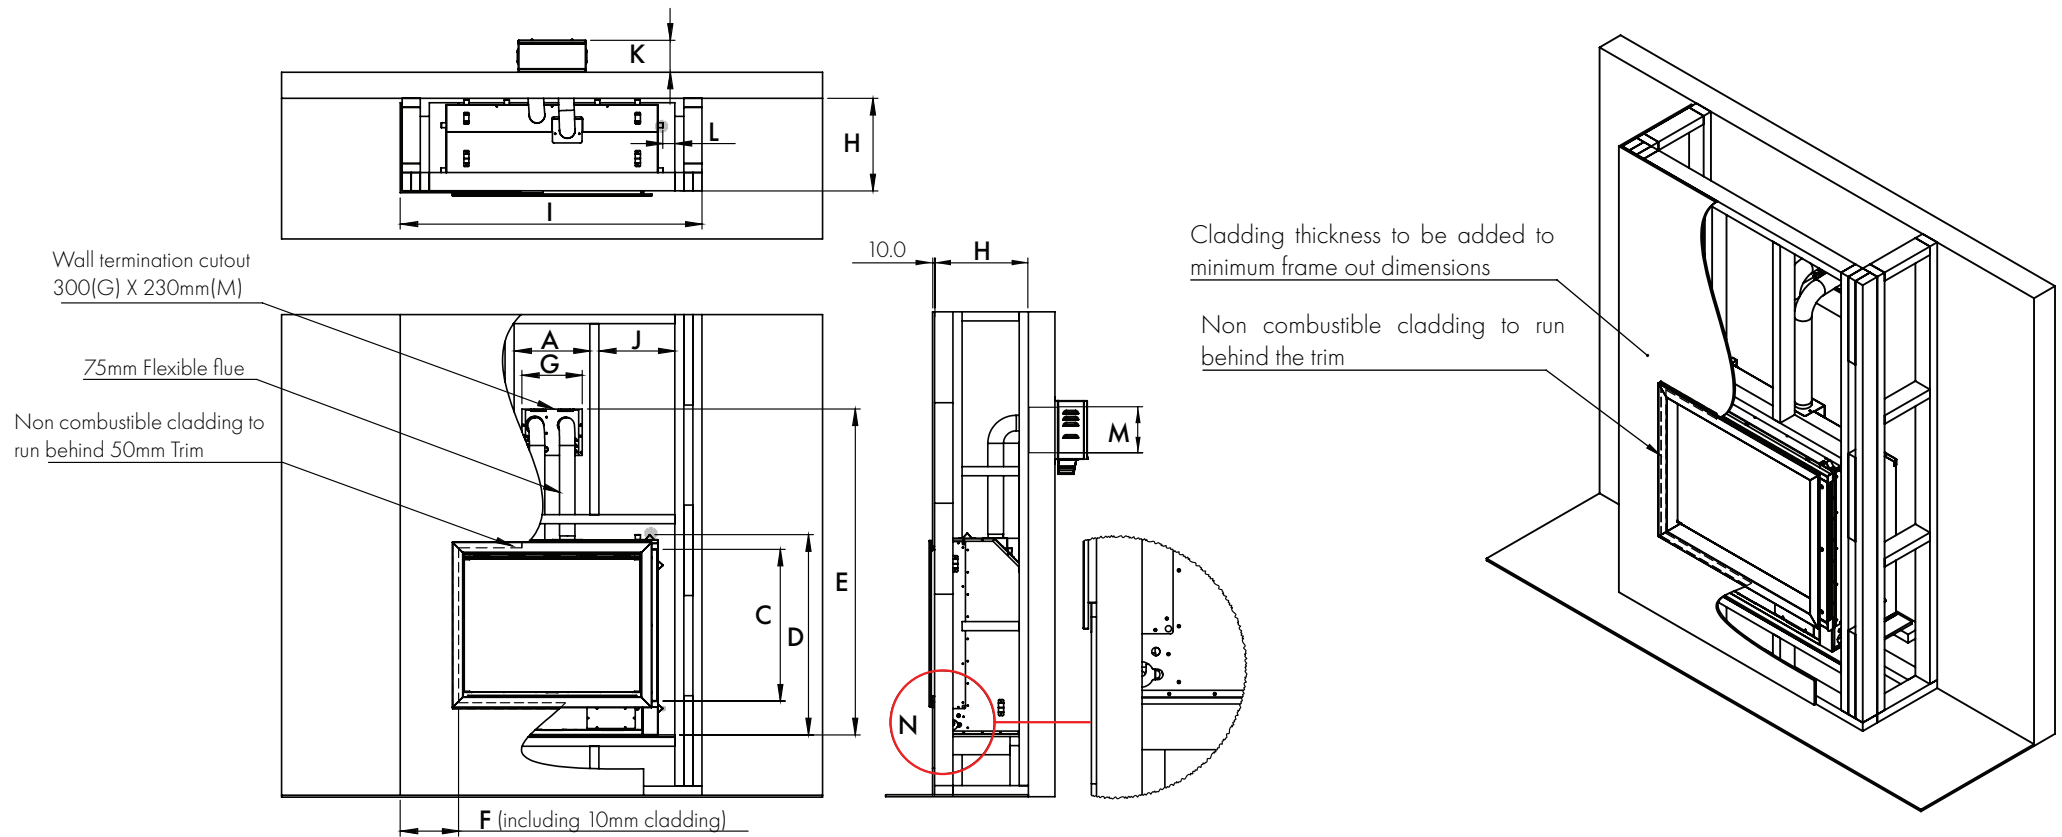

A	C	D	E	F	G	H	I	J	K	L	M
377	755	1295	1620	290	300	460	1500	377	159	60	230

NOTE

Use suitable support base, plywood not necessary.

Detail N

Allow min 80mm clearance for wire and gas pipe connection on the side of the framing to the unit.

If the framing is done as close to the clearance standoffs then, the timber framing must be notched to allow for the wiring and gas connection to pass.

VISIT WWW.REALFLAME.COM.AU FOR MORE INFORMATION. REFER TO THE MANUAL FOR MOST UP TO DATE TECHNICAL INFORMATION.

SPECIFICATIONS

APPLIANCE TYPE	High Efficiency Gas Fireplace	
STAR RATING	up to 4.7 stars	
MAX HEAT OUTPUT	up to 6.6kW	
ROOM SIZE	approx. up to 95m ²	
GAS TYPE	Natural Gas	LPG
GAS INPUT	28 High/22 Low	28 High/22 Low

MEDIA OPTIONS



REDGUM & COALS



DRIFTWOOD



ALPINE FOREST



LOGS & COAL



PEBBLES
*4 pebble colour option-
(shown above - white pebbles)

TRIM OPTIONS



50MM BLACK TRIM
POWDERCOAT BLACK



18MM TRIM
POWDERCOAT BLACK
*INCLUDES FLANGE KIT FOR FLUSH WALL FINISH






Glen Dimplex Australia Pty Ltd
8 Lakeview Drive,
Scoresby, VIC 3179
T 1300 554 155
E flame.care@glendimplex.com.au



Real Flame is a registered trademark of
Glen Dimplex Australia Pty Ltd, all rights reserved.

RF_ELE900P 23

Authorised Real Flame Dealer



realflame.com.au