




## FRAMING SIZE 6X CLEAN FACE

NON COMBUSTIBLE SHEETING  
13mm FYRCHECK MUST BE  
FITTED AROUND FIRE

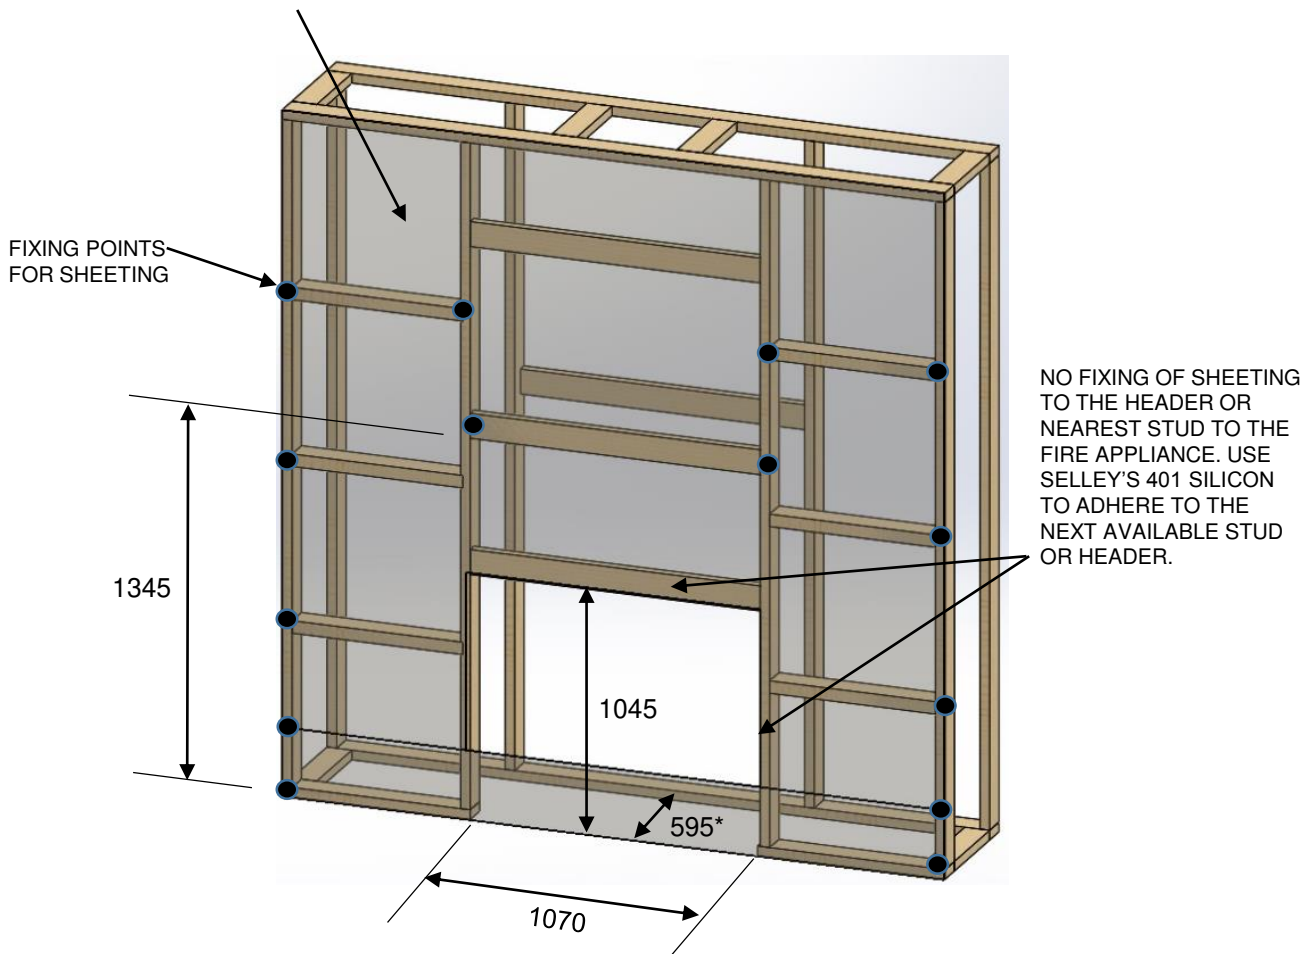

**\* WHEN USING CLEAN FACE FRONT ONLY**

**NOTE:** DO NOT CUT SHEETING TO THE OPENING SIZE (1045x1070) THERE IS AN OVERLAP REQUIRED

32mm X 20mm ANGLE (PAINTED BLACK) TO BE ATTACHED TO THE FRAME OF THE FIREPLACE ADJACENT TO THE OPENING FOR GLASS FRONT. 20mm LEG OF ANGLE TO BE FIXED TO FIRE. TOP OF THE ANGLE TO ALIGN WITH LOUVRE ON TOP OF THE FIRE.

IF THE FRAME DEPTH IS NOT INCREASED WHEN USING CLEAN FACE FRONT, IT WILL PROTRUDE BY 20-30MM INTO THE ROOM.

# 6X CLEAN FACE NON COMBUSTIBLE SHEETING

