




361 Swan St
 Richmond, Victoria 3121
 Office: +61 3 99 777 888

TIMBER FRAMING INSTALLATION SHEET

Quadro 650
 Quadro 800

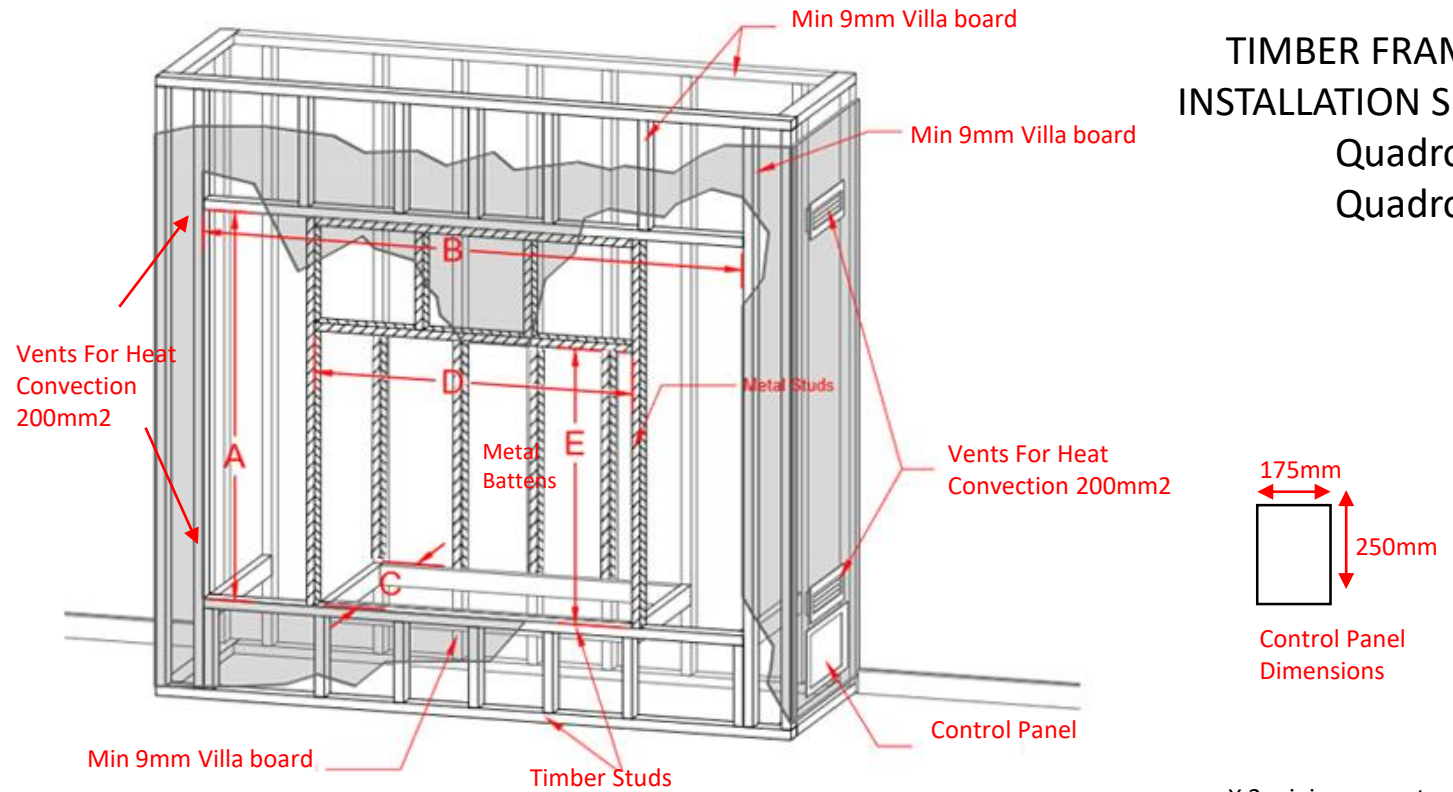

Unit stands on small legs that sit on framing/floor which provide sufficient clearance .
 Flexible connections descend from the middle of the unit to control panel.

X 2 minimum vents required
 X 4 vents for more efficient heat dispersion

Fireplace Dimensions (in mm)			Timber Frame (Clearance to Combustibles in mm)			Option for smaller clearance: Metal Studs fixed to rear combustible wall. (50mm clearance + 6mm Villa Board + 25mm Steel Battens fixed to combustible wall)	Metal Studs Infills to be installed after Unit (Clearance between unit and metal stud infill = 50mm) Clear installation dimensions in mm.		
H	W	D	A	B	C	C*	D	E	
			Unit Height +350mm top	Unit Width +250 each side	Unit Depth + 250mm to back	Unit Depth + 81mm=	Unit Width + 50mm either side	Unit Height + 50mm top	
Quadro 650 GF	998	760	315	1348	1260	565	396	860	1048
Quadro 800 GF	989	1055	330	1339	1555	580	411	1155	1039